Flannery Road - Florida Blvd Comprehensive Rehabilitation Project (Phase 1)

City-Parish #TBD (PDP # SGU-R-0003a)

Project Start: February 2014
Advertise for Bids: May 2015
Project End: September 2016
% Complete: 0% Design
0% Construction


Rehabilitation of the sewer collection system is a comprehensive physical process that begins with cleaning and inspection of sewer pipes and manholes. Typical rehabilitation repairs include pipe and manhole replacement and trenchless technologies that minimize above ground disturbances, such as cured-in-place pipe liners.




One of the first steps in rehabilitation includes a physical inspection of manholes and pipes to identify blockages.



Simply cleaning the pipes and manholes in preparation for the physical inspection removes blockages, debris and roots.



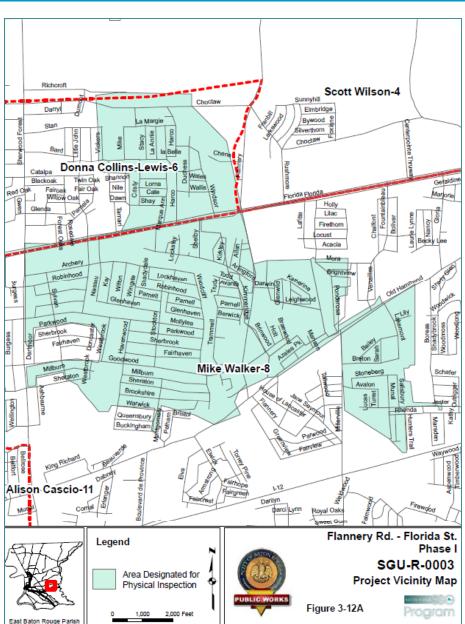

Flannery Road - Florida Boulevard - Phase 1 - Project Facts

The construction of rehabilitation projects will typically include the following components:

- · Replacement of pipes
- Point repair of pipes
- Rehabilitation of pipes by cured in place pipe liners
- Rehabilitation or replacement of manholes
- Repair of sewer laterals to the property line

Design Consultant: CSRS, Inc.

Construction Contractor:
To be determined

Estimated Construction Cost: \$7,900,000.