

South Blvd - St Joseph St - Phase B Sewer Area Upgrades

City-Parish # 08-GS-ST-018B & 09-GS-UF-008B

Advertisement for Bids: **3rd Quarter 2013**

Anticipated Project End: **4th Quarter 2014**

The project consists of approximately 1,760 ft of 8-inch, 10-inch, and 12-inch gravity and approximately 2,520 ft of 36-inch and 60-inch gravity upstream of PS 59. This project also includes approximately 1,410 ft of 24-inch and 30-inch force main to extend the PS 60 force main.




Trench boxes are used for pipeline installation.



Signage notifies residents of underground construction activities.



Over 3,000 linear feet of gravity and force main will be upgraded .

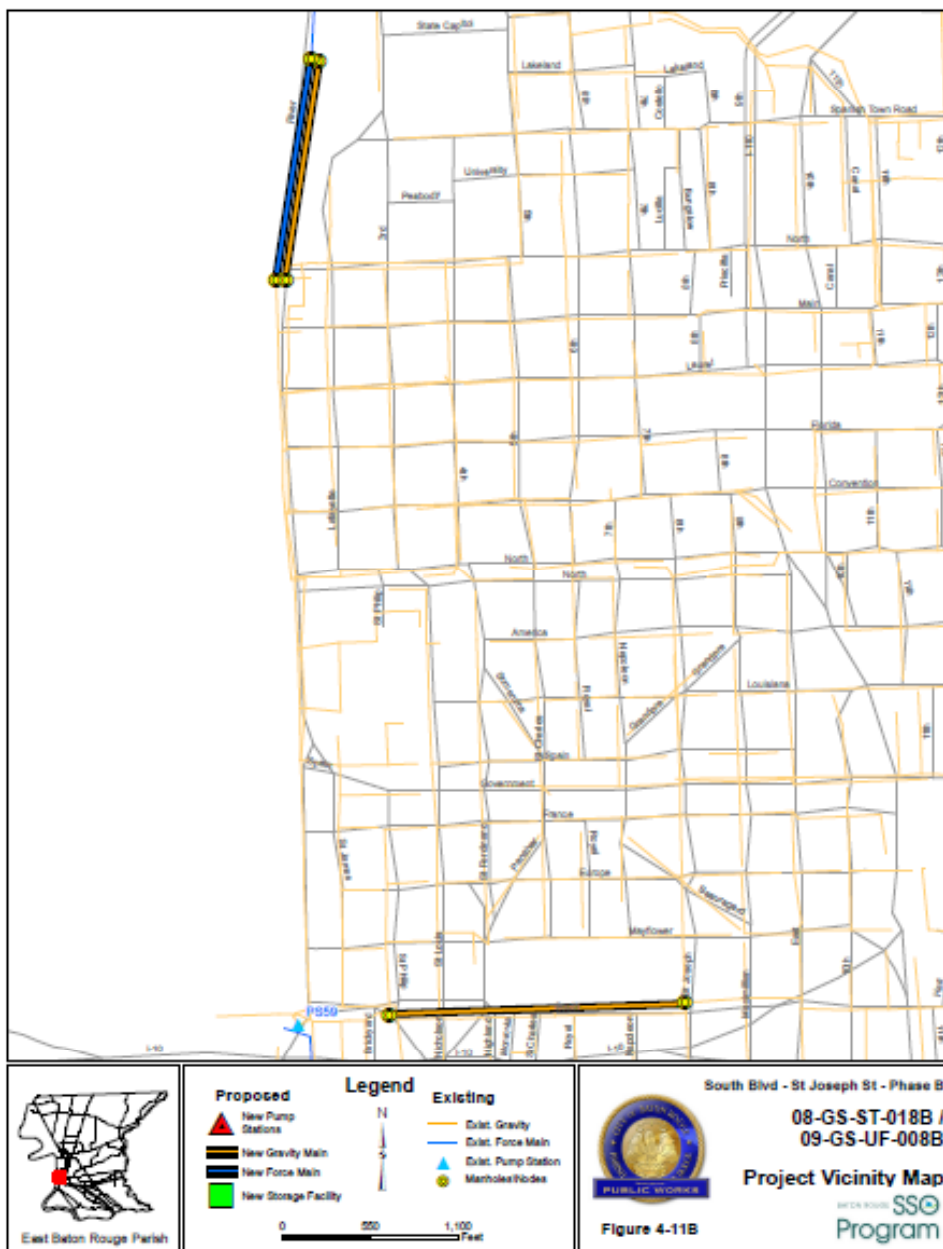

South Blvd – St. Joseph St / 25th St. – N. Acadian – Phase B Project Facts

GRAVITY MAIN IMPROVEMENTS:

- 4,280 linear feet, 8-60 in. diameter

Design Consultant:

Hartman Engineering
Shread-Kuyrkendall & Associates

FORCEMAIN IMPROVEMENTS:

- 1,410 linear feet, 24-30 in. diameter

Construction Contractor:

JB James Construction

Estimated Construction Cost: \$7.5 M