

# Brookstown Rd - Evangeline St Area Rehabilitation Project (Phase 2)

City-Parish #10-AR-BD-0040

Advertisement for Bid: **4<sup>th</sup> Quarter 2010**  
 Project End: **4<sup>th</sup> Quarter 2012**

Rehabilitation of existing gravity sewer lines by open excavation and cured-in-place lining, manhole repair and replacement, and cleaning and televising of gravity sewer lines and manholes within the designated area. Includes approximately 21,600 linear feet of 6- to 30-inch diameter pipe open-cut repairs and 57,400 linear feet of 8- to 18-inch and 5,000 linear feet of 24- to 36-inch people diameter pipe CIPP rehabilitation.




One of the first steps in rehabilitation includes a physical inspection of manholes and pipes to identify blockages.



Simply cleaning the pipes and manholes in preparation for the physical inspection removes blockages, debris and roots.



As of December 2013

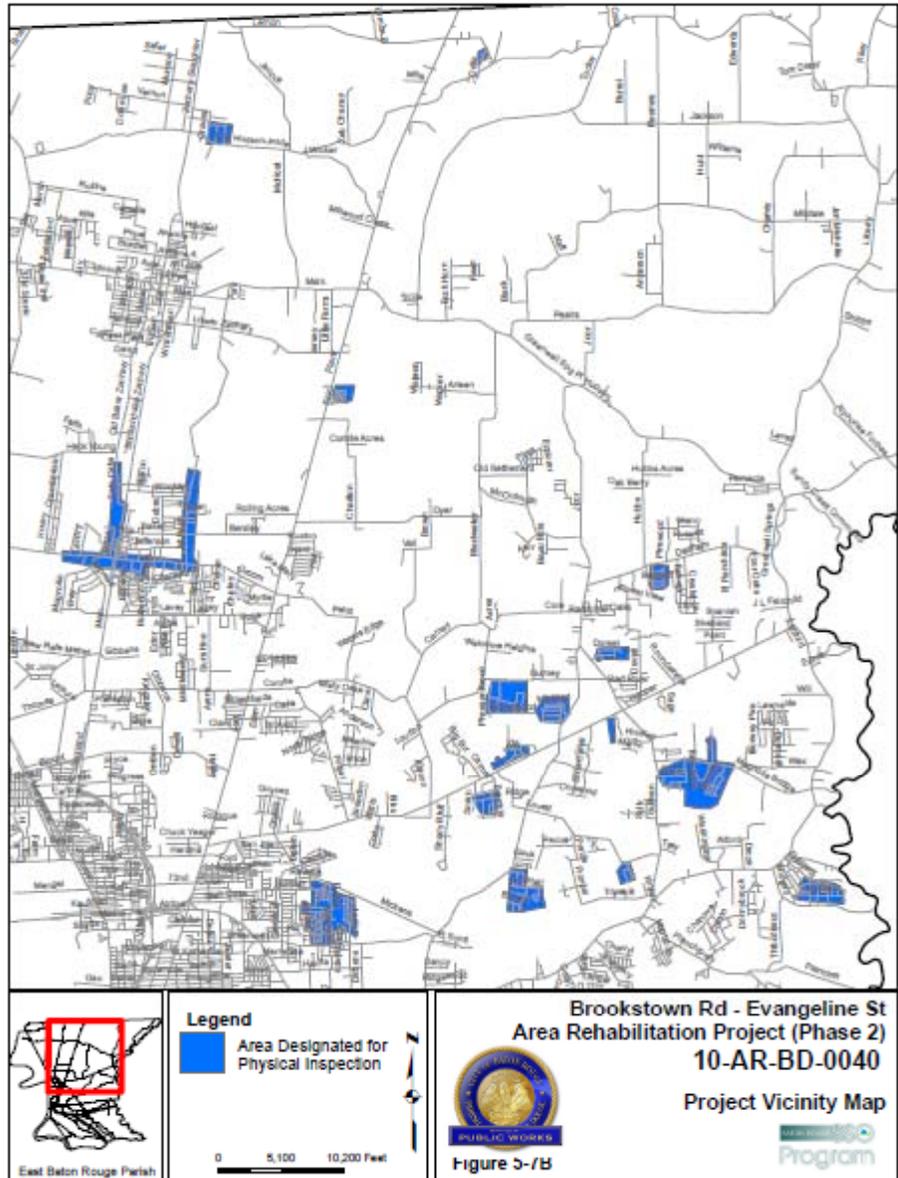

## Brookstown Rd - Evangeline St Area Rehabilitation Project (Phase 2) Facts

For this project:

- Approximately 246,937 linear feet of pipeline were inspected and rehabilitated
- Approximately 1,064 manholes were rehabilitated or replaced

Design Consultant:

Rehab Program Mgmt Team

Construction Contractor:

John Plott Company

**Estimated Construction Cost: \$5.4 M**