

Comite Dr - Foster Rd Sewer Area Upgrades (Phase 2)

City-Parish #02-CS-HC-0001

Advertise for Bids: **3rd Quarter 2009**
 Project End: **1st Quarter 2011**

The project consists of upgrading approximately 2 miles of force main piping system that transport sewage from one pump station to a collector or another pump station. The project is primarily located north of Windcrest Avenue at Foster Road to the South of Comite Drive near Whispering Oaks. The section of the pipeline near Comite Drive was completed early to facilitate Comite Drive improvements.




Wet wells and manholes are frequently upgraded during construction.



Trench boxes are used for pipeline installation.



Signage notifies residents of underground construction activities.

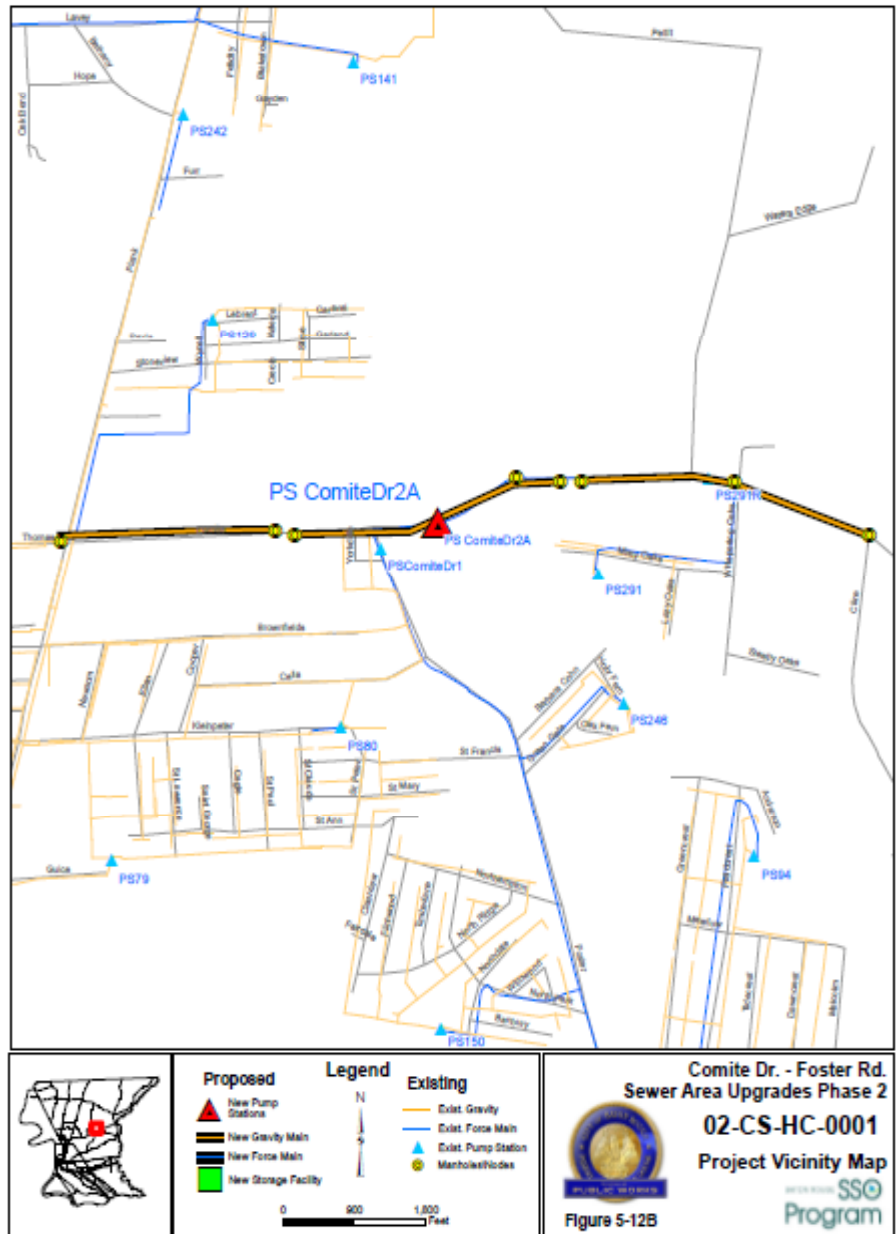

Comite Dr - Foster Rd Sewer Area Upgrades (Phase 2) Project Facts

FORCE MAIN IMPROVEMENTS

- 330 linear feet, 3-6 in. diameter

GRAVITY SEWER IMPROVEMENTS

- 9380 linear feet, 8 in. diameter

PUMP STATION IMPROVEMENTS

- 2 pump stations, 60-230 gallons per minute peak wet weather flow

Construction costs covered by the Green Light Program

Design Consultant
 Monroe & Corie

Construction Contractor
 JB James Construction