

Elm Grove Garden Road - Harding Boulevard Comprehensive Rehabilitation Project

City-Parish #09-AR-BD-0012 (PDP # NGS-R-0001)

Project Start: **October 2008**
 Advertise for Bids: **September 2009**
 Project End: **September 2011**

Project is 100% Complete


Rehabilitation of the sewer collection system is a comprehensive physical process that begins with cleaning and inspection of sewer pipes and manholes. Typical rehabilitation repairs include pipe and manhole replacement and trenchless technologies that minimize above ground disturbances, such as cured-in-place pipe liners.



One of the first steps in rehabilitation includes a physical inspection of manholes and pipes to identify blockages.



Simply cleaning the pipes and manholes in preparation for the physical inspection removes blockages, debris and roots.

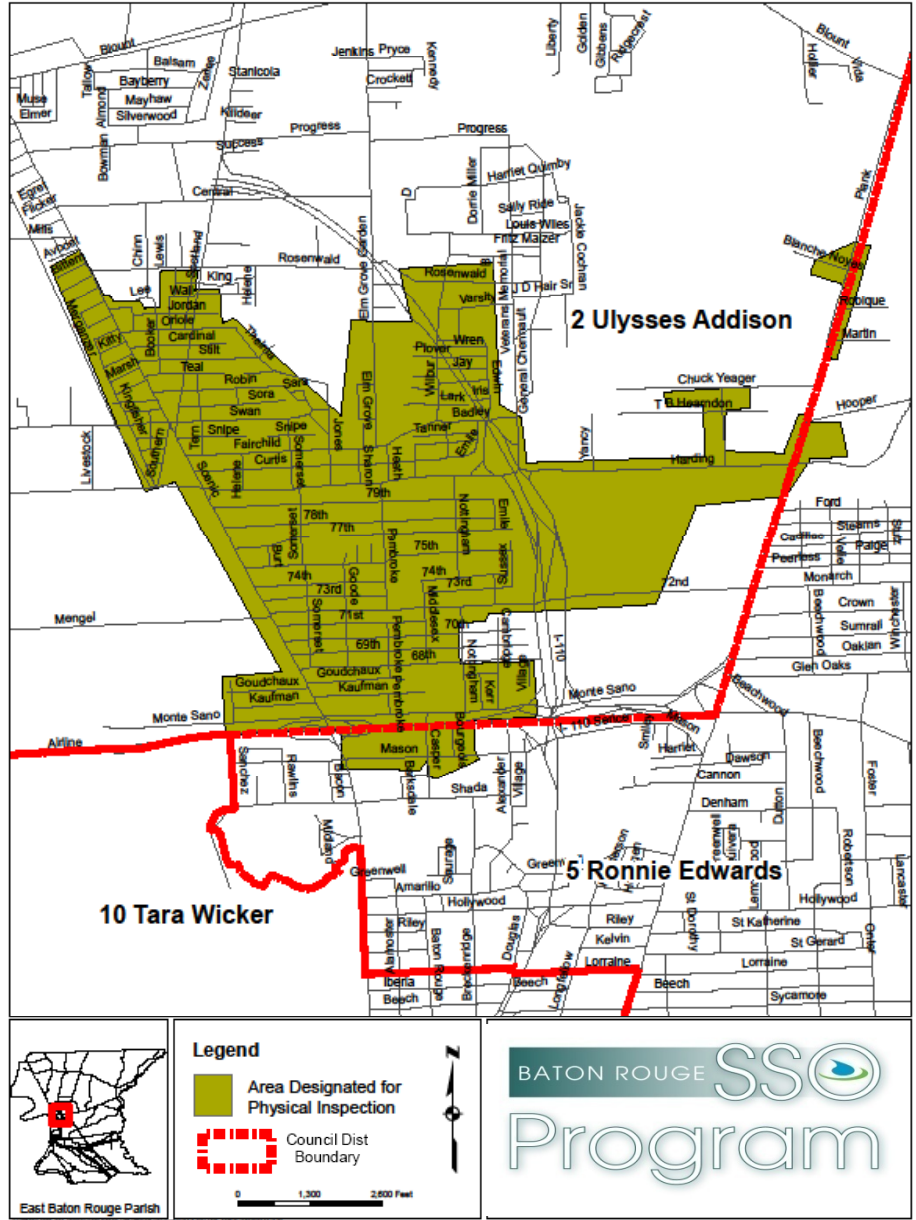

Elm Grove Garden Road - Harding Boulevard Project Facts

The construction of rehabilitation projects will typically include the following components:

- Replacement of pipes
- Point repair of pipes
- Rehabilitation of pipes by cured in place pipe liners
- Rehabilitation or replacement of manholes
- Repair of sewer laterals to the property line

Design Consultant:
CSRS, Inc.

Construction Contractor:
Allen & LeBlanc, Inc.

Estimated Construction Cost: \$12,989,270.