

# Foster Dr - Government St Area Rehabilitation Project (Phase B)

City-Parish #09-AR-BD-015A

Advertise for Bids: **2<sup>nd</sup> Quarter 2010**  
 Project End: **3<sup>rd</sup> Quarter 2012**


Rehabilitation of the sewer collection system is a comprehensive physical process that begins with cleaning and inspection of sewer pipes and manholes. Typical rehabilitation repairs include pipe and manhole replacement and trenchless technologies that minimize above ground disturbances, such as cured-in-place pipe liners. Phase A includes open cut repairs and Phase B includes CIPP lining.



One of the first steps in rehabilitation includes a physical inspection of manholes and pipes to identify blockages.



Simply cleaning the pipes and manholes in preparation for the physical inspection removes blockages, debris and roots.

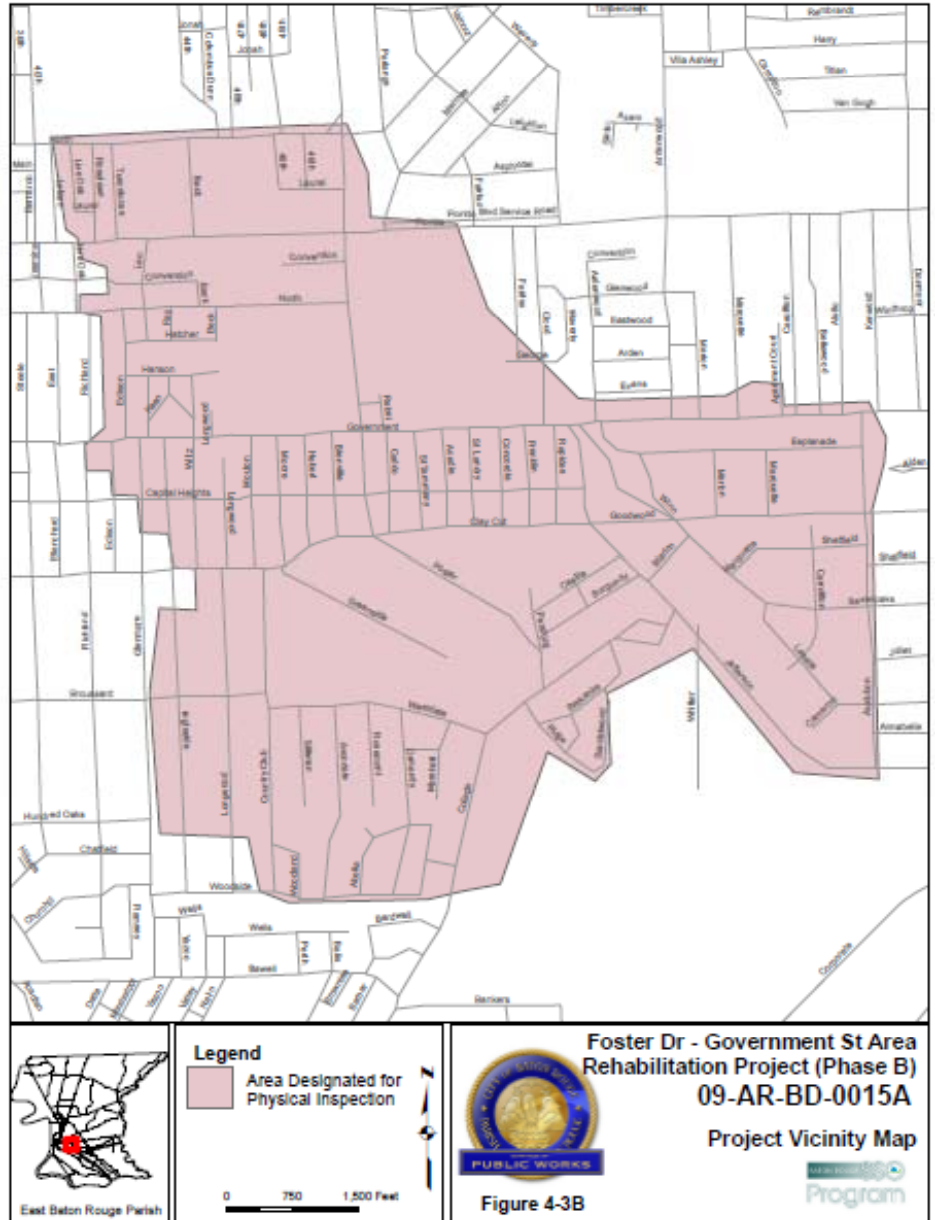

## Foster Dr - Government St Area Rehabilitation Project (Phase B) Project Facts

For the Foster Dr-Government St Area Rehabilitation Projects:

- Approximately 159,300 linear feet of pipeline inspected and rehabilitated
- Approximately 629 manholes rehabilitated or replaced

Design Consultant:  
 Rehab Prog Mgmt Team

Construction Contractor:  
 Insituform Technologies

**Construction Cost: \$2.5 M**