

# I-110 - Hollywood St Area Rehabilitation Project

City-Parish #12-AR-MS-0040

Advertise for Bids: **1<sup>st</sup> Quarter 2014**  
 Anticipated Project End: **4<sup>th</sup> Quarter 2015**


Rehabilitation of the sewer collection system is a comprehensive physical process that begins with cleaning and inspection of sewer pipes and manholes. Typical rehabilitation repairs include pipe and manhole replacement and trenchless technologies that minimize above ground disturbances, such as cured-in-place pipe liners.



One of the first steps in rehabilitation includes a physical inspection of manholes and pipes to identify blockages.



Simply cleaning the pipes and manholes in preparation for the physical inspection removes blockages, debris and roots.

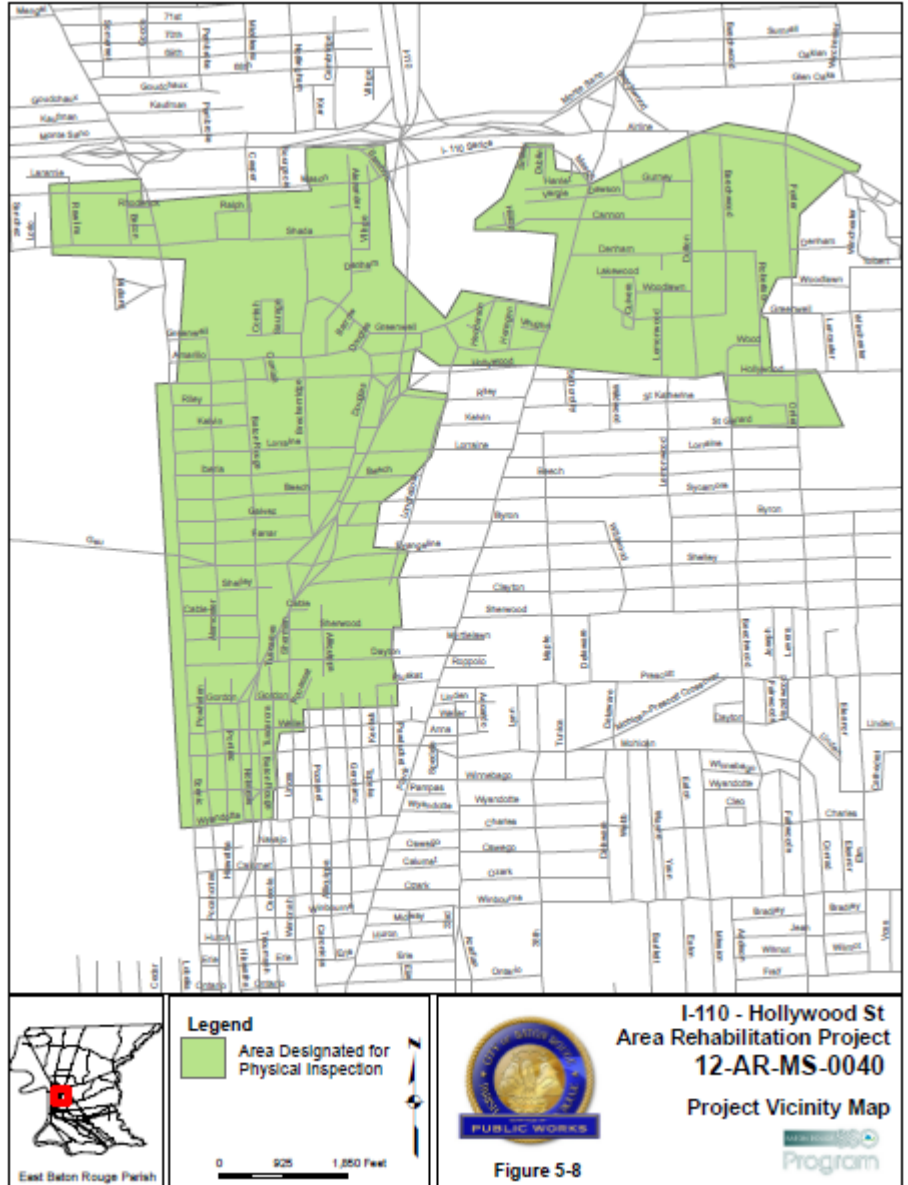

## I-110 - Hollywood St Area Rehabilitation Project Facts

For this project:

- Approximately 145,880 linear feet of pipeline were inspected and rehabilitated
- Approximately 579 manholes were rehabilitated or replaced

Design Consultant:

Rehab Prog Mgmt Team

Construction Contractor:

Wharton-Smith, Inc.

**Estimated Construction Cost: \$6.0 M**