

Jones Creek Rd - Tiger Bend Rd Area Rehabilitation Project

City-Parish #12-AR-MS-0038

Advertise for Bids: **4th Quarter 2013**
Anticipated Project End: **2nd Quarter 2015**


Rehabilitation of the sewer collection system is a comprehensive physical process that begins with cleaning and inspection of sewer pipes and manholes. Typical rehabilitation repairs include pipe and manhole replacement and trenchless technologies that minimize above ground disturbances, such as cured-in-place pipe liners.



One of the first steps in rehabilitation includes a physical inspection of manholes and pipes to identify blockages.



Simply cleaning the pipes and manholes in preparation for the physical inspection removes blockages, debris and roots.

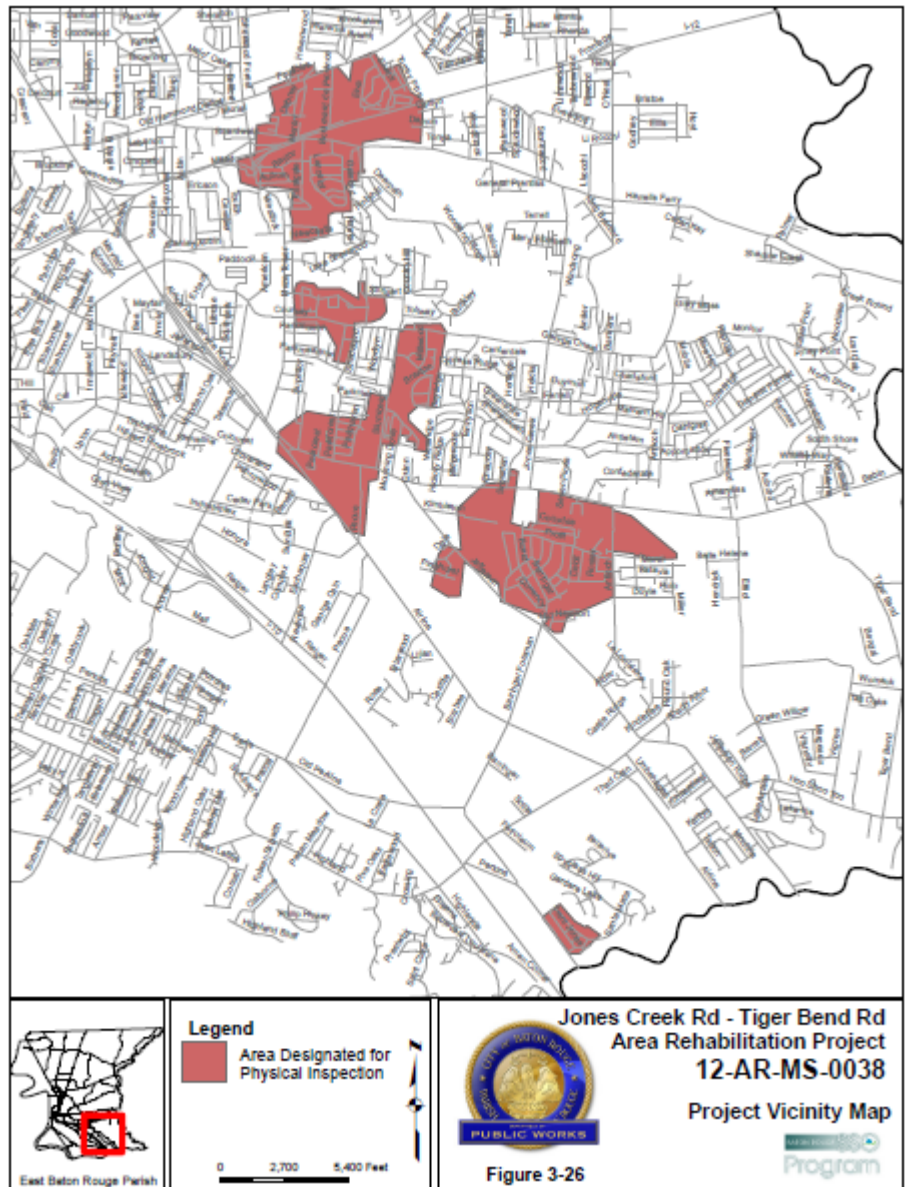

Jones Creek Rd - Tiger Bend Rd Area Rehabilitation Project Facts

For this project:

- Approximately 237,248 linear feet of pipeline were inspected and rehabilitated
- Approximately 1,078 manholes were rehabilitated or replaced

Design Consultant:

Rehab Prog Mgmt Team

Construction Contractor:

To be determined

Estimated Construction Cost: \$12.2 M