

Joor Rd - Greenwell Springs Rd Sewer Area Upgrades

City-Parish # 10-FM-MS-0023

Advertise for Bids: **2nd Quarter 2015**
 Anticipated Project End: **1st Quarter 2017**


The project involves the design and construction of force main upgrades in the North Forced West Basin. The upgrades are designed to alleviate chronic SSOs at the pump stations and increase the force main capacity. The upgrades range in size from 4 to 24-inch diameter.



Flow measurements are taken throughout the collection system to determine the correct pump station upgrade size.



A total of 32,420 linear feet of various sizes of force main will be upgraded in the project area.

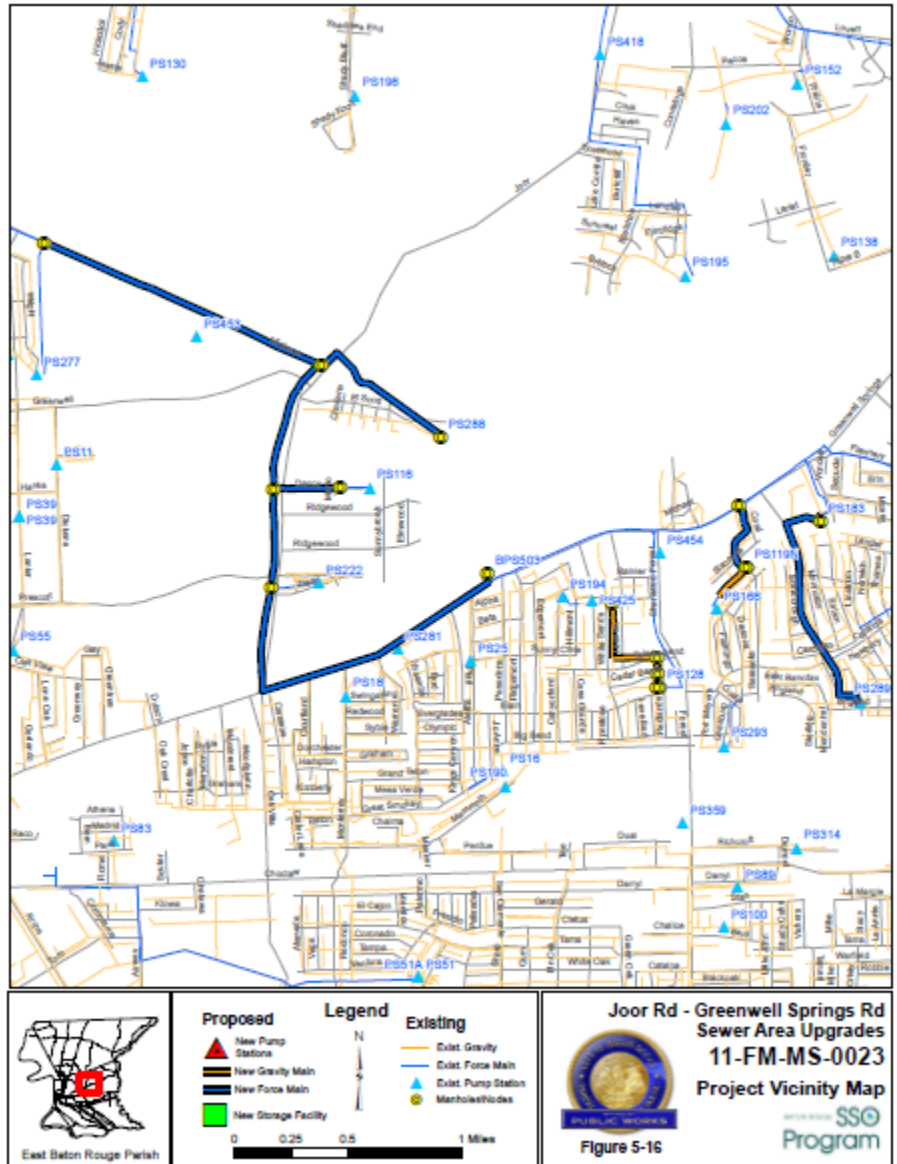

Joor Rd - Greenwell Springs Rd Sewer Area Upgrades Project Facts

FORCEMAIN IMPROVEMENTS:

- 32,420 linear feet, 4-24 in. diameter

GRAVITY MAIN IMPROVEMENTS:

- 4,960 linear feet, 10-12 in. pipe

Design Consultant:

TRC Engineers
 Digital Engineering & Imaging

Construction Contractor:

To be determined

Estimated Construction Cost: \$6.9 M