

Lovett Rd - Greenwell Springs Rd Sewer Area Upgrades (Group A)

City-Parish # 10-FM-MS-049A

Advertise for Bids: **3rd Quarter 2014**
 Anticipated Project End: **4th Quarter 2015**

The purpose this project is to increase the capacity of the force main system in the North East Force main Basin to assist in transferring peak flows to the main STN sewer along Hooper Road and to increase the capacity of the gravity sewer systems upstream of PS155, PS195, PS200, and PS231. The gravity sewer replacement will work to alleviate chronic SSOs in the gravity basins upstream of these pump stations.




Flow measurements are taken throughout the collection system to determine the correct pump station upgrade size.



A total of 64,050 linear feet of various sizes of force main will be upgraded in the project area.

As of January 2014

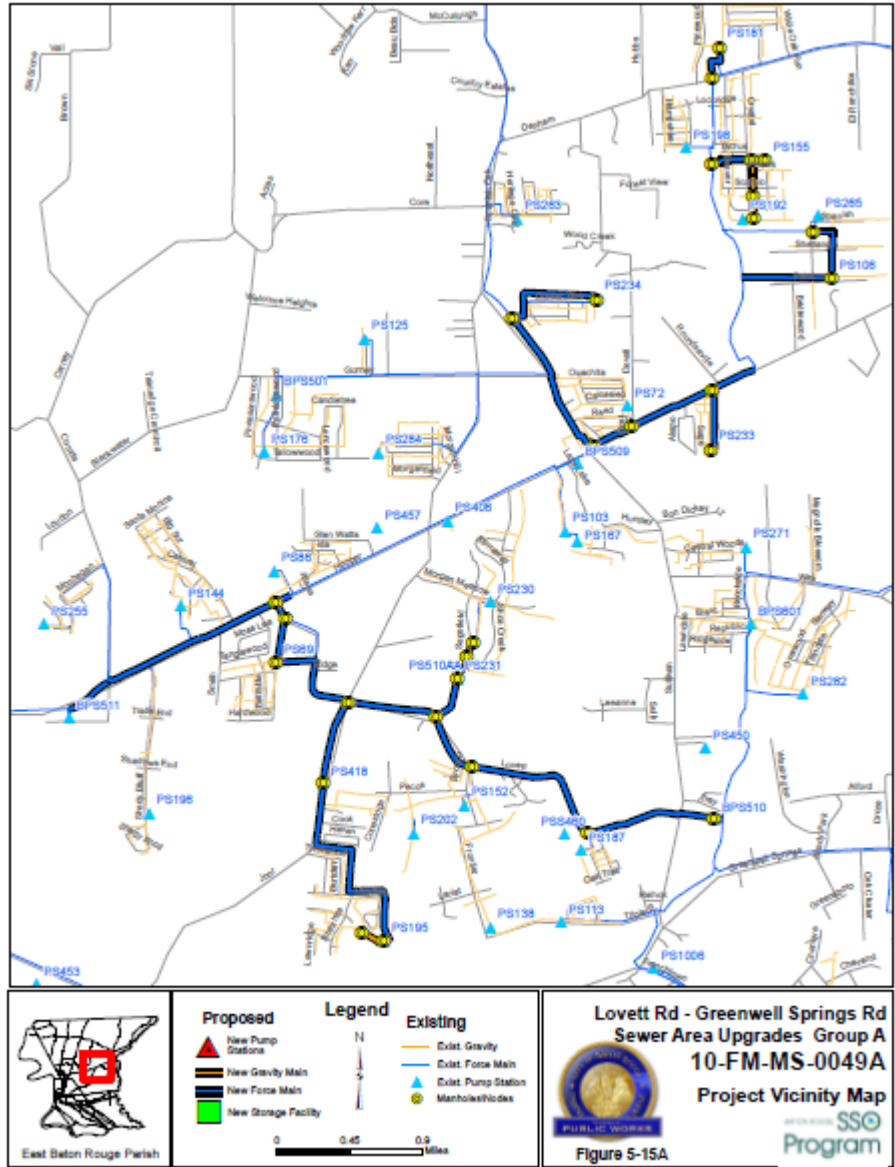

Lovett Rd - Greenwell Springs Rd Sewer Area Upgrades (Group A) Project Facts

FORCE MAIN IMPROVEMENTS:

- 64,050 linear feet, 6-36 in. diameter

GRAVITY MAIN IMPROVEMENTS:

- 2,960 linear feet, 10-15 in. pipe

Design Consultant:

SJB / Owen & White

Construction Contractor:

To be determined

Estimated Construction Cost: \$14.2 M