


RMAP1 – Industriplex Area Upgrades Remedial Action Plan 1 Project

City-Parish #99-RMP-S08 (PDP # 99-RMP-S08)

Project Start: **November 2006**
Advertise: **November 2006**
Project End: **January 2011**

Project is 100% Complete

The Industriplex Area Waste Water Upgrade Project is located in the Seigen Lane/Industriplex Boulevard area. The project includes the demolition of six pump stations. A new gravity sewer system was constructed routing the sewer flow from the six demolished pump stations to one new centralized pump station new PS332, on Exchequer Drive between Little Cayman and Merchant Drive. A new 167" forcemain discharges from the new station to an existing 42" forcemain east of Pecue Lane. This project reduces operation and maintenance costs and reduces potential odor issues within the existing pump station.

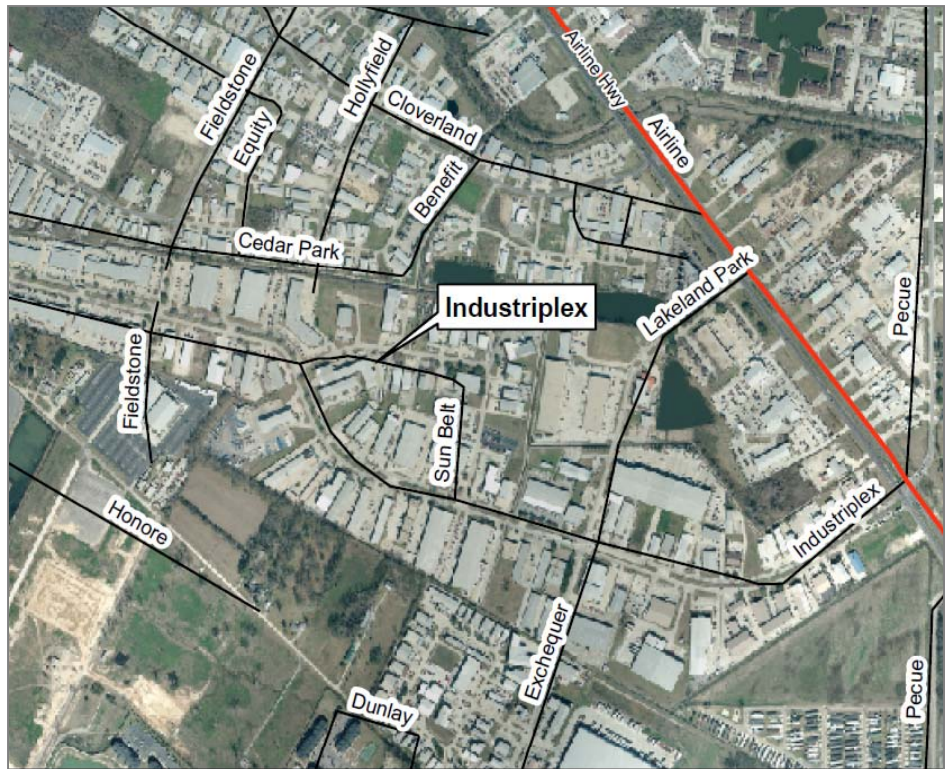

Six pump stations will be demolished in the Industriplex area.



Pump station 287 was demolished and replaced with new pump station 332.

RMAP1 – Industriplex Area Upgrades Project Facts



FORCEMAIN IMPROVEMENTS:

- 6-inch forcemain; 2000 feet

PUMP STATION UPGRADES

- PS382 – Capacity Upgrades

Design Consultant:

Forte & Tablada

Construction Contractor:

BRH Garver

Estimated Construction Cost: \$9,914,060.