
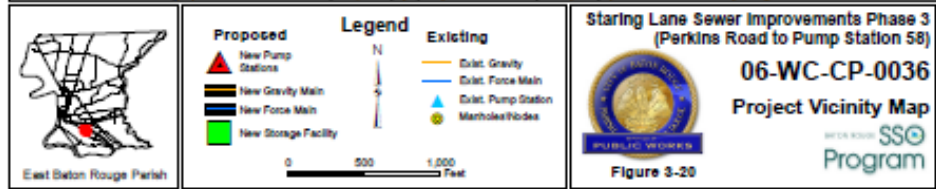


# Staring Ln Sewer Improvements - Phase 3 (Perkins Road to Pump Station 58)

City-Parish #06-WC-CP-0036

Advertisement for Bids: **2<sup>nd</sup> Quarter 2011**  
Project End: **3<sup>rd</sup> Quarter 2014**

This project involves the construction of a portion of the new force main from the PS58 to the South WWTP. The purpose of this project is to relieve SSOs at PS58 as well as in the respective upstream and downstream basins. The construction of the direct force main between PS58 and the South WWTP alleviates the wet weather flows into existing downstream gravity pipe, and allows the capacity needed for future flows in the Staring Lane area. This project is being constructed simultaneous with the Green Light Plan's (GLP) roadwork.

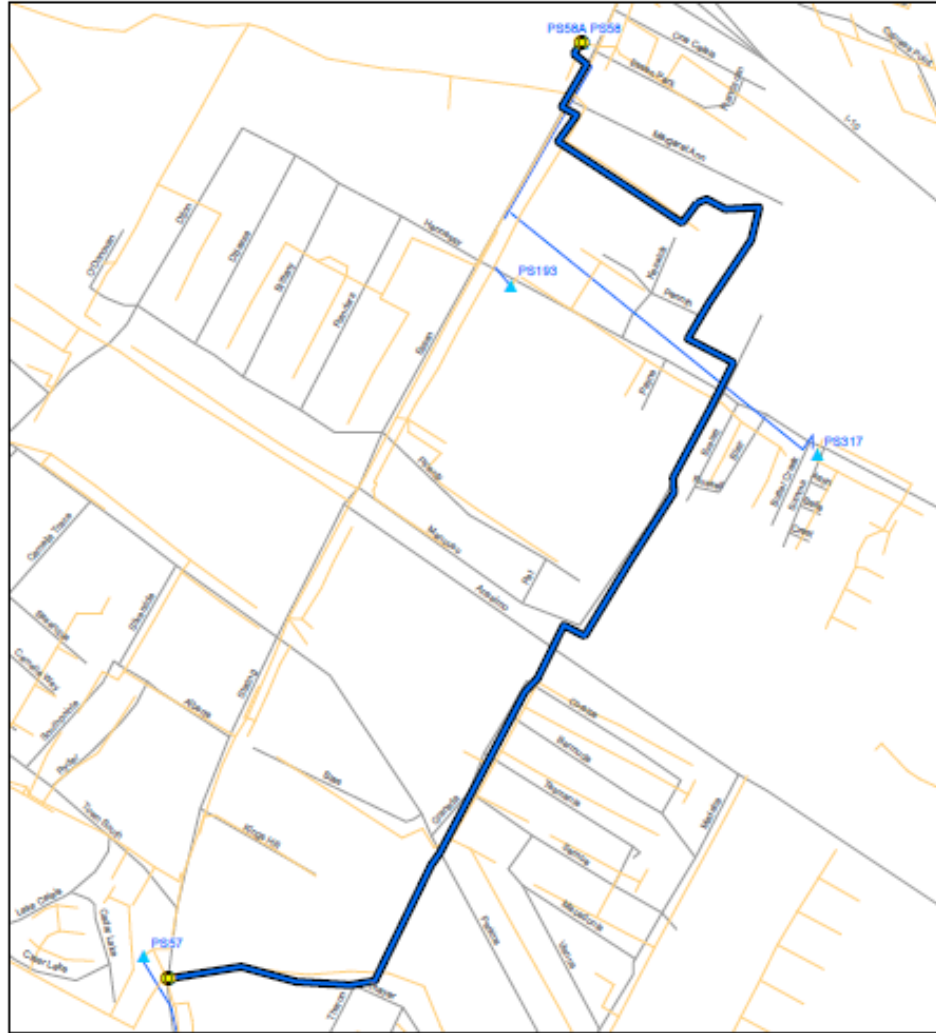

Once complete, SSOs at PS58 will be reduced.



New forcemain will be constructed in the project area.



60-inch diameter forcemain will be installed in the project area.

## Staring Ln Sewer Improvements - Phase 3 (Perkins Road to Pump Station 58) Project Facts

### FORCEMAIN IMPROVEMENTS:

- 9,970 linear feet, 16-60 in. diameter

### Design Consultant:

Monroe & Corie

### Construction Contractor:

Reynolds, Inc.

**Estimated Construction Cost: \$8.7 M**